

FARCO TOP 200

Water Based Waterproofing Membrane

Product Description

FARCOTOP 200 is water based, polymer emulsion waterproofing membrane which is produced in different colors.

● Uses

Non-bitumen elastic membrane for waterproofing inverted roofs, concrete arches, bathrooms, gypsum boards and thatch facades.

- Waterproofing membrane for gypsum boards in bathrooms and kitchens
- Colorful membrane with high adhesion properties to asphalt

● Advantages

- Easy to apply
- Produced in different colors
- Permanent elastic
- Resistant against heat in bathrooms and Under floor heating systems
- Water based, no harmful materials
- Water resistant after curing
- A good replacement instead of thatch in humid and rainy areas
- Applicable in both vertical and horizontal substrates

● Specification

Appearance	Paste, with different colors
Specific Gravity	1.5 (kg/L)
PH	9

● Instruction for Use

Surface Preparation

- Surfaces must be sound, stable, dry, clean and free of dust, loose, flaking, friable material and substances that may diminish adhesion.
- Repair the removed areas with mortars (sand, cement) which are modified with emulsion polymers such as SA12 or SA46 according to their usage instructions.
- In case of low concrete surface quality with too much defects which should be removed, it is recommended to apply the whole surface with a layer of polymer modified mortar then coat it with FARCOTOP200.

Application

- Mix thoroughly the contents of the pail
- Apply a layer of primer (1part AL10 + 4 parts water) with a brush on to the prepared surface, then after drying perform FARCOTOP200 with trowel or airless spray.
- For improving the performance in hip roofs, arches and bath room's walls, it is recommended to reinforce the membrane with polymer net. While the membrane is not set yet, put the acrylic net on it and gently trowel until the paste comes out of the pores.
- When FARCOTOP 200 is used as thatch,

FARCO TOP 200

shake the straw on newly applied coating and gently trowel it in order that the straw slightly penetrates, finally apply a layer of diluted AL10 on to the dried surface.

· As a decorative coating on asphalts, firstly wash the surface, secondly apply a layer of diluted AL10, thirdly apply 2 layers of FARCOTOP 200 and at the end apply the diluted AL10 again.

● Packaging


FARCOTOP 200 is supplied in 4 and 12 kg pails.

● Storage and Shelf life

6 month when stored in the unopened containers in a dry location at 5 to 35°C.

● Technical Service

The SHIMISAKHTEMAN technical service Department is available to assist you in the field and correct use of our products..

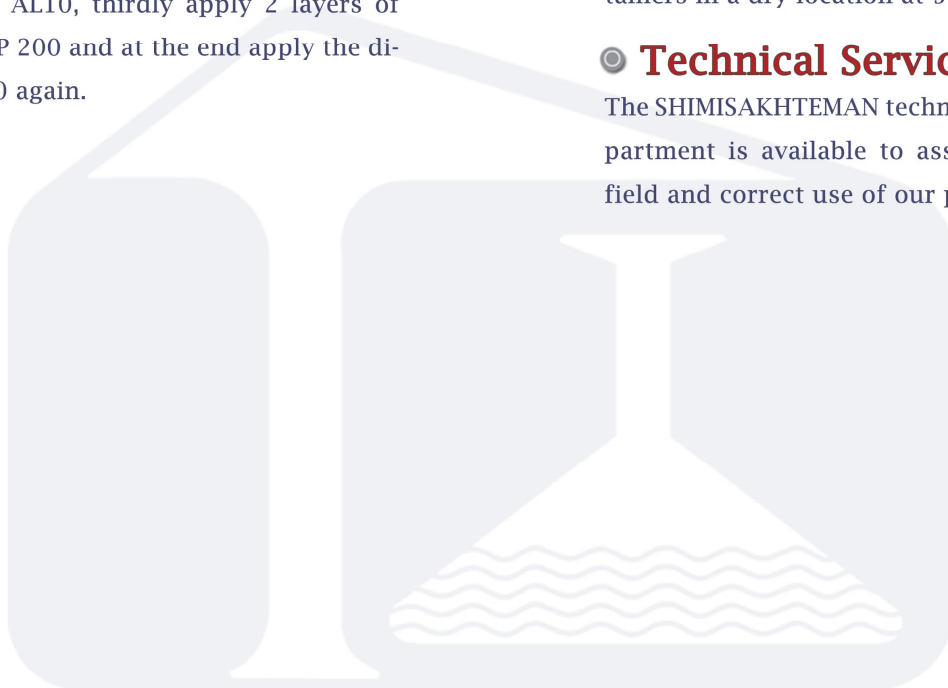

242 Bldg., Mirdamad Blvd., After Naft St., Tehran. Iran

Tel: +98 21 (22263100 , 22263099 , 22259736) Fax: +98 21 22260586

Shimi Sakhteman



+98 21 27427